

1. GENERAL

A. RELATED DOCUMENTS

- 1) ALL WORK SHALL BE SUBJECT TO THE GENERAL CONDITIONS AND SHALL COMPLY WITH APPLICABLE REQUIREMENTS OF THE CONTRACT.

B. REFERENCE STANDARDS

- 1) MATERIAL AND INSTALLATION SHALL COMPLY WITH LATEST EDITIONS OF APPLICABLE CODES, RECOMMENDED PRACTICES AND STANDARDS OF ASHRAE, AMCA, MECH. ELEC. DIV. ASHRAE AND U.L.

C. SUBMITTALS

1) GENERAL

- 1) EQUIPMENT AND MATERIAL SUBMITTALS SHALL SHOW SUFFICIENT DATA TO INDICATE COMPLETE COMPLIANCE WITH CONTRACT DOCUMENTS AS FOLLOWS:
 - (1) PROPER SIZES AND COMPLETE PERFORMANCE DATA.
 - (2) THAT THE ITEM WILL FIT IN THE AVAILABLE SPACE, IN A MANNER THAT WILL ALLOW PROPER SERVICE.
 - (3) CONSTRUCTION METHODS, MATERIALS AND FINISHES.
 - (4) INSTALLATION INSTRUCTIONS.
 - (5) CONTROL AND WIRING DIAGRAMS.
 - (6) OPERATING INSTRUCTIONS.

- 2) CATALOG DATA MUST SHOW CLEARLY MARKED THE ITEM OR NUMBER TO BE FURNISHED, WITH ALL ACCESSORIES INDICATED. ALL IRRELEVANT INFORMATION MUST BE MARKED OUT, LEAVING ONLY THAT INFORMATION WHICH IS PERTINENT, PROVIDE CONTROL DIAGRAM FOR EACH SYSTEM/COMPONENT CORRESPONDING TO ITS SEQUENCE OF OPERATION.

- 3) SHOW ALL DIMENSIONS OF EACH ITEM OF EQUIPMENT ON A SINGLE COMPOSITE SHOP DRAWING, NOT ON A SERIES OF DRAWINGS, PROVIDE SEQUENCE OF OPERATION FOR EACH SYSTEM, ACCOMPANIED BY THE WIRING DIAGRAM.

- 4) COORDINATE EACH SUBMITTAL WITH REQUIREMENTS OF THE WORK AND OF CONTRACT DOCUMENTS FOR DIVISIONS 15 AND 16 PRIOR TO REVIEW AND APPROVAL.

- 5) NOTIFY THE OWNER IN WRITING AT TIME OF SUBMISSION, OF DEVIATIONS IN SUBMITTALS FROM REQUIREMENTS OF CONTRACT DOCUMENTS.

- 6) BEGIN NO INSTALLATION WORK WHICH REQUIRES SUBMITTALS UNTIL RETURN OF SUBMITTALS WITH PROPERLY EXECUTED STAMP INDICATING REVIEW AND APPROVAL.

- 7) PROVIDE THE FOLLOWING SHOP DRAWINGS:

a) MANUFACTURER'S DRAWINGS:

- (1) CATALOGUE CUTS AND MANUFACTURER'S DRAWING OF ALL AUTOMATIC TEMPERATURE, PRESSURE AND HUMIDITY SENSING AND CONTROL DEVICES, INCLUDING RANGES, SET POINTS, ADJUSTABILITY AND ACCESSORIES. IDENTIFY EACH SHEET TO CORRELATE EQUIPMENT DESIGNATION WITH INSTALLATION DRAWINGS.

b) CONTROL DIAGRAMS:

- (1) SUBMIT CONTROL DIAGRAMS FOR ALL CONTROL SCHEMES, WITH WRITTEN DESCRIPTION OF ALL CONTROL MODES AND FUNCTIONS FOR EACH SYSTEM:
 - (a) THE CONTROL SEQUENCE IN THE SPECIFICATIONS DESCRIBES THE PERFORMANCE OF THE VARIOUS SYSTEMS. PROVIDE ALL CONTROL ELEMENTS, FUNCTIONS AND WIRING FOR THE INTENDED SYSTEM OPERATION, AND SHOW SAME ON DIAGRAM.

c) INSTALLATION DRAWINGS:

- (1) FRONTAL EXTERIOR VIEW OF EACH LOCAL CONTROL PANEL SHOWING LOCATION OF SWITCHES, GAUGES AND PILOT LIGHTS, ASSOCIATED LABELS AND FLOW DIAGRAMS.
- (2) INTERIOR VIEW OF LOCAL CONTROL PANELS SHOWING PHYSICAL LAYOUT OF ALL DEVICES, INTERCONNECTING WIRING AND IDENTIFICATION TAGS.

d) GENERAL SCOPE OF WORK:

- (1) PROVIDE A COMPLETE INSTALLATION OF PNEUMATIC/ELECTRONIC/DOO CONTROL SYSTEM FOR CONTROLLING, SUPERVISING AND AUTOMATICALLY MAINTAINING THE DESIRED SPACE CONDITIONS AS SET BY THE VARIOUS THERMOSTATS, PRESSURE SENSORS AND OTHER SENSORS AND CONTROLLERS SPECIFIED OR INDICATED.

- (2) THE ENTIRE CONTROL AND BUILDING MANAGEMENT SYSTEM (BMS) SHALL BE PROVIDED BY HONEYWELL, STRATA CONTROLS OR L-3 POWERS AND INSTALLED UNDER THE MANUFACTURER'S SUPERVISION AND DIRECTION. THE SYSTEM SHALL INCLUDE BUT NOT BE LIMITED TO THE FOLLOWING FUNCTIONS:
 - (a) FUTURE FUNCTION/POINT EXPANDABILITY.
 - (b) INTERLOCKING WITH THE FUEL MANAGEMENT SYSTEM.
 - (c) SCHEDULED START-UP AT RESTORATION OF POWER AFTER AN ELECTRICAL OUTAGE.
 - (d) PROGRAMMED START/STOP.
 - (e) EXECUTION OF LIFE SAFETY INSTRUCTIONS RECEIVED FROM FIRE COMMAND CENTER, ETC.
 - (f) DIAGNOSTIC SYSTEM DISPLAY FOR EACH HVAC SYSTEM.

- (3) CONTROL SYSTEM SHALL BE AUTOMATIC IN OPERATION AND SHALL UTILIZE COMPRESSED AIR FOR PNEUMATIC SIGNALS AND FOR PNEUMATICALLY OPERATED ACTUATORS SUCH AS CONTROL VALVE AND DAMPER PNEUMATIC MOTORS.

- (4) ALL PROPORTIONING TYPE DAMPERS SHALL HAVE PNEUMATIC ACTUATORS; UNIT HEATERS SHALL BE ELECTRIC MOTOR ACTUATED VIA ELECTRIC LINE VOLTAGE THERMOSTATS.

- (5) IT SHALL BE THE DIVISION 15 CONTRACTOR'S RESPONSIBILITY TO EMPLOY TEMPERATURE CONTROL AND FUEL MANAGEMENT SYSTEM MANUFACTURERS UTILIZING COMPATIBLE SIGNALS AND COMPATIBLE EQUIPMENT WITH EACH OTHER'S SYSTEMS AND THE BASE BUILDING SCADA SYSTEM.

- (6) THE DIVISION 15 CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOLLOWING:
 - (a) PROVIDE A COMPLETE INSTALLATION OF PNEUMATIC/ELECTRONIC/DOO CONTROL SYSTEM FOR CONTROLLING, SUPERVISING AND AUTOMATICALLY MAINTAINING THE DESIRED SPACE CONDITIONS AS SET BY THE VARIOUS THERMOSTATS, PRESSURE SENSORS AND OTHER SENSORS AND CONTROLLERS SPECIFIED OR INDICATED.
 - (b) INTERLOCKING WITH THE FUEL MANAGEMENT SYSTEM.
 - (c) SCHEDULED START-UP AT RESTORATION OF POWER AFTER AN ELECTRICAL OUTAGE.
 - (d) PROGRAMMED START/STOP.
 - (e) EXECUTION OF LIFE SAFETY INSTRUCTIONS RECEIVED FROM FIRE COMMAND CENTER, ETC.
 - (f) DIAGNOSTIC SYSTEM DISPLAY FOR EACH HVAC SYSTEM.

- (7) CONTROL SYSTEM SHALL BE AUTOMATIC IN OPERATION AND SHALL UTILIZE COMPRESSED AIR FOR PNEUMATIC SIGNALS AND FOR PNEUMATICALLY OPERATED ACTUATORS SUCH AS CONTROL VALVE AND DAMPER PNEUMATIC MOTORS.

- (8) ALL PROPORTIONING TYPE DAMPERS SHALL HAVE PNEUMATIC ACTUATORS; UNIT HEATERS SHALL BE ELECTRIC MOTOR ACTUATED VIA ELECTRIC LINE VOLTAGE THERMOSTATS.

- (9) IT SHALL BE THE DIVISION 15 CONTRACTOR'S RESPONSIBILITY TO EMPLOY TEMPERATURE CONTROL AND FUEL MANAGEMENT SYSTEM MANUFACTURERS UTILIZING COMPATIBLE SIGNALS AND COMPATIBLE EQUIPMENT WITH EACH OTHER'S SYSTEMS AND THE BASE BUILDING SCADA SYSTEM.

- (10) THE DIVISION 15 CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOLLOWING:
 - (a) PROVIDE A COMPLETE INSTALLATION OF PNEUMATIC/ELECTRONIC/DOO CONTROL SYSTEM FOR CONTROLLING, SUPERVISING AND AUTOMATICALLY MAINTAINING THE DESIRED SPACE CONDITIONS AS SET BY THE VARIOUS THERMOSTATS, PRESSURE SENSORS AND OTHER SENSORS AND CONTROLLERS SPECIFIED OR INDICATED.
 - (b) INTERLOCKING WITH THE FUEL MANAGEMENT SYSTEM.
 - (c) SCHEDULED START-UP AT RESTORATION OF POWER AFTER AN ELECTRICAL OUTAGE.
 - (d) PROGRAMMED START/STOP.
 - (e) EXECUTION OF LIFE SAFETY INSTRUCTIONS RECEIVED FROM FIRE COMMAND CENTER, ETC.
 - (f) DIAGNOSTIC SYSTEM DISPLAY FOR EACH HVAC SYSTEM.

- (11) CONTROL SYSTEM SHALL BE AUTOMATIC IN OPERATION AND SHALL UTILIZE COMPRESSED AIR FOR PNEUMATIC SIGNALS AND FOR PNEUMATICALLY OPERATED ACTUATORS SUCH AS CONTROL VALVE AND DAMPER PNEUMATIC MOTORS.

- (12) ALL PROPORTIONING TYPE DAMPERS SHALL HAVE PNEUMATIC ACTUATORS; UNIT HEATERS SHALL BE ELECTRIC MOTOR ACTUATED VIA ELECTRIC LINE VOLTAGE THERMOSTATS.

- (13) IT SHALL BE THE DIVISION 15 CONTRACTOR'S RESPONSIBILITY TO EMPLOY TEMPERATURE CONTROL AND FUEL MANAGEMENT SYSTEM MANUFACTURERS UTILIZING COMPATIBLE SIGNALS AND COMPATIBLE EQUIPMENT WITH EACH OTHER'S SYSTEMS AND THE BASE BUILDING SCADA SYSTEM.

- (14) THE DIVISION 15 CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOLLOWING:
 - (a) PROVIDE A COMPLETE INSTALLATION OF PNEUMATIC/ELECTRONIC/DOO CONTROL SYSTEM FOR CONTROLLING, SUPERVISING AND AUTOMATICALLY MAINTAINING THE DESIRED SPACE CONDITIONS AS SET BY THE VARIOUS THERMOSTATS, PRESSURE SENSORS AND OTHER SENSORS AND CONTROLLERS SPECIFIED OR INDICATED.
 - (b) INTERLOCKING WITH THE FUEL MANAGEMENT SYSTEM.
 - (c) SCHEDULED START-UP AT RESTORATION OF POWER AFTER AN ELECTRICAL OUTAGE.
 - (d) PROGRAMMED START/STOP.
 - (e) EXECUTION OF LIFE SAFETY INSTRUCTIONS RECEIVED FROM FIRE COMMAND CENTER, ETC.
 - (f) DIAGNOSTIC SYSTEM DISPLAY FOR EACH HVAC SYSTEM.

- (15) CONTROL SYSTEM SHALL BE AUTOMATIC IN OPERATION AND SHALL UTILIZE COMPRESSED AIR FOR PNEUMATIC SIGNALS AND FOR PNEUMATICALLY OPERATED ACTUATORS SUCH AS CONTROL VALVE AND DAMPER PNEUMATIC MOTORS.

- (16) ALL PROPORTIONING TYPE DAMPERS SHALL HAVE PNEUMATIC ACTUATORS; UNIT HEATERS SHALL BE ELECTRIC MOTOR ACTUATED VIA ELECTRIC LINE VOLTAGE THERMOSTATS.

- (17) IT SHALL BE THE DIVISION 15 CONTRACTOR'S RESPONSIBILITY TO EMPLOY TEMPERATURE CONTROL AND FUEL MANAGEMENT SYSTEM MANUFACTURERS UTILIZING COMPATIBLE SIGNALS AND COMPATIBLE EQUIPMENT WITH EACH OTHER'S SYSTEMS AND THE BASE BUILDING SCADA SYSTEM.

- (18) THE DIVISION 15 CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOLLOWING:
 - (a) PROVIDE A COMPLETE INSTALLATION OF PNEUMATIC/ELECTRONIC/DOO CONTROL SYSTEM FOR CONTROLLING, SUPERVISING AND AUTOMATICALLY MAINTAINING THE DESIRED SPACE CONDITIONS AS SET BY THE VARIOUS THERMOSTATS, PRESSURE SENSORS AND OTHER SENSORS AND CONTROLLERS SPECIFIED OR INDICATED.
 - (b) INTERLOCKING WITH THE FUEL MANAGEMENT SYSTEM.
 - (c) SCHEDULED START-UP AT RESTORATION OF POWER AFTER AN ELECTRICAL OUTAGE.
 - (d) PROGRAMMED START/STOP.
 - (e) EXECUTION OF LIFE SAFETY INSTRUCTIONS RECEIVED FROM FIRE COMMAND CENTER, ETC.
 - (f) DIAGNOSTIC SYSTEM DISPLAY FOR EACH HVAC SYSTEM.

- (19) CONTROL SYSTEM SHALL BE AUTOMATIC IN OPERATION AND SHALL UTILIZE COMPRESSED AIR FOR PNEUMATIC SIGNALS AND FOR PNEUMATICALLY OPERATED ACTUATORS SUCH AS CONTROL VALVE AND DAMPER PNEUMATIC MOTORS.

- (20) ALL PROPORTIONING TYPE DAMPERS SHALL HAVE PNEUMATIC ACTUATORS; UNIT HEATERS SHALL BE ELECTRIC MOTOR ACTUATED VIA ELECTRIC LINE VOLTAGE THERMOSTATS.

- (21) IT SHALL BE THE DIVISION 15 CONTRACTOR'S RESPONSIBILITY TO EMPLOY TEMPERATURE CONTROL AND FUEL MANAGEMENT SYSTEM MANUFACTURERS UTILIZING COMPATIBLE SIGNALS AND COMPATIBLE EQUIPMENT WITH EACH OTHER'S SYSTEMS AND THE BASE BUILDING SCADA SYSTEM.

- (22) THE DIVISION 15 CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOLLOWING:
 - (a) PROVIDE A COMPLETE INSTALLATION OF PNEUMATIC/ELECTRONIC/DOO CONTROL SYSTEM FOR CONTROLLING, SUPERVISING AND AUTOMATICALLY MAINTAINING THE DESIRED SPACE CONDITIONS AS SET BY THE VARIOUS THERMOSTATS, PRESSURE SENSORS AND OTHER SENSORS AND CONTROLLERS SPECIFIED OR INDICATED.
 - (b) INTERLOCKING WITH THE FUEL MANAGEMENT SYSTEM.
 - (c) SCHEDULED START-UP AT RESTORATION OF POWER AFTER AN ELECTRICAL OUTAGE.
 - (d) PROGRAMMED START/STOP.
 - (e) EXECUTION OF LIFE SAFETY INSTRUCTIONS RECEIVED FROM FIRE COMMAND CENTER, ETC.
 - (f) DIAGNOSTIC SYSTEM DISPLAY FOR EACH HVAC SYSTEM.

- (23) CONTROL SYSTEM SHALL BE AUTOMATIC IN OPERATION AND SHALL UTILIZE COMPRESSED AIR FOR PNEUMATIC SIGNALS AND FOR PNEUMATICALLY OPERATED ACTUATORS SUCH AS CONTROL VALVE AND DAMPER PNEUMATIC MOTORS.

- (24) ALL PROPORTIONING TYPE DAMPERS SHALL HAVE PNEUMATIC ACTUATORS; UNIT HEATERS SHALL BE ELECTRIC MOTOR ACTUATED VIA ELECTRIC LINE VOLTAGE THERMOSTATS.


- (25) IT SHALL BE THE DIVISION 15 CONTRACTOR'S RESPONSIBILITY TO EMPLOY TEMPERATURE CONTROL AND FUEL MANAGEMENT SYSTEM MANUFACTURERS UTILIZING COMPATIBLE SIGNALS AND COMPATIBLE EQUIPMENT WITH EACH OTHER'S SYSTEMS AND THE BASE BUILDING SCADA SYSTEM.

- (26) THE DIVISION 15 CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOLLOWING:
 - (a) PROVIDE A COMPLETE INSTALLATION OF PNEUMATIC/ELECTRONIC/DOO CONTROL SYSTEM FOR CONTROLLING, SUPERVISING AND AUTOMATICALLY MAINTAINING THE DESIRED SPACE CONDITIONS AS SET BY THE VARIOUS THERMOSTATS, PRESSURE SENSORS AND OTHER SENSORS AND CONTROLLERS SPECIFIED OR INDICATED.
 - (b) INTERLOCKING WITH THE FUEL MANAGEMENT SYSTEM.
 - (c) SCHEDULED START-UP AT RESTORATION OF POWER AFTER AN ELECTRICAL OUTAGE.
 - (d) PROGRAMMED START/STOP.
 - (e) EXECUTION OF LIFE SAFETY INSTRUCTIONS RECEIVED FROM FIRE COMMAND CENTER, ETC.
 - (f) DIAGNOSTIC SYSTEM DISPLAY FOR EACH HVAC SYSTEM.

- (27) CONTROL SYSTEM SHALL BE AUTOMATIC IN OPERATION AND SHALL UTILIZE COMPRESSED AIR FOR PNEUMATIC SIGNALS AND FOR PNEUMATICALLY OPERATED ACTUATORS SUCH AS CONTROL VALVE AND DAMPER PNEUMATIC MOTORS.


3. SEQUENCE OF OPERATION

A. EMERGENCY GENERATOR

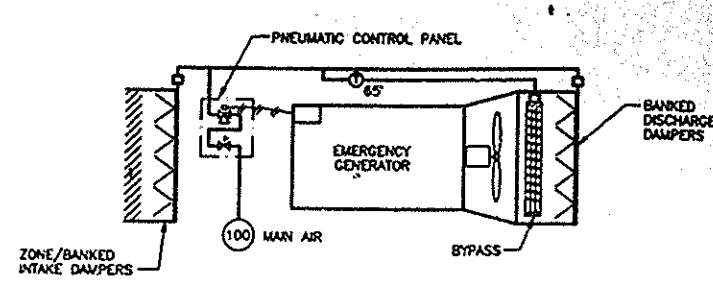

- 1) MAIN AIR AT 100 PSI FROM THE 9TH FLOOR MER TO BE FED TO THE PNEUMATIC CONTROL PANEL, WHERE IT IS REDUCED TO 20 PSI WITH A PRESSURE REDUCING VALVE. THE TEMPERATURE CONTROL CONTRACTOR TO PROVIDE A PNEUMATIC CONTROL PANEL OF EQUIVALENT SIZE TO HOUSE ALL EP SWITCHES FOR ALL SYSTEMS IN THE BUILDING.
- 2) A START SIGNAL FROM AN INDIVIDUAL EMERGENCY GENERATOR SHALL ENERGIZE ITS DEDICATED EP SWITCH AND PRESSURIZE THE ZONED DAMPER OPERATORS FOR THE INTAKE AND DISCHARGE DAMPERS. DAMPERS SHALL BE FULLY OPEN WITHIN 10 SECONDS.
- 3) THE BYPASS DAMPERS PNEUMATIC THERMOSTAT SHALL BE ENERGIZED ANY TIME THE GENERATOR IS ENERGIZED. THE PNEUMATIC DAMPERS WILL OPEN IF THE THERMOSTAT READS 65 F OR BELOW.

B. EXHAUST FANS

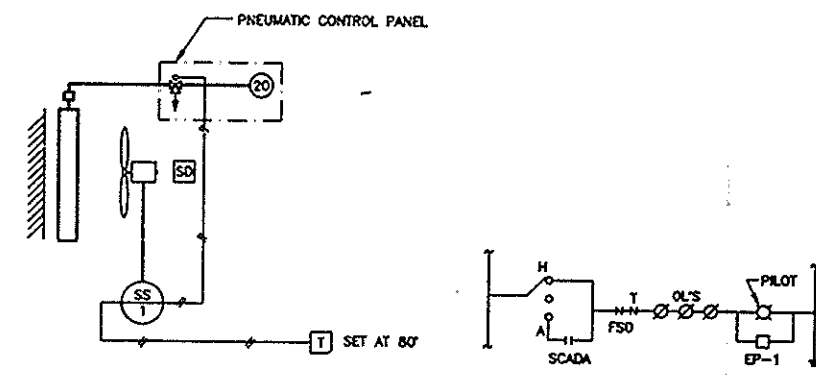

CONTROL DIAGRAM EF-1 & 2

NOT TO SCALE



EF-1 & 2 WIRING DIAGRAM

NOT TO SCALE


- 1) EF-1 AND EF-2 SEQUENCE OF OPERATION
- 2) START/STOP CONTROL
 - (a) THE FAN MAY BE STARTED AND STOPPED LOCALLY AT THE MOTOR STARTER HAND-OFF-AUTOMATIC SWITCH. WHEN THE HOA IS IN THE AUTOMATIC POSITION, THE FAN MAY BE STARTED/STOPPED THROUGH THE SCADA SYSTEM EITHER MANUALLY BY A KEYBOARD COMMAND OR AUTOMATICALLY ACCORDING TO A PROGRAMMED TIME SCHEDULE. AS LONG AS THE ROOM TEMPERATURE IS ABOVE 80 F.
- 3) WHEN THE FAN IS ENERGIZED AND THE ROOM TEMPERATURE IS ABOVE 80 F, EP-1 WILL BE ENERGIZED AND PNEUMATIC DAMPER MOTOR SHALL DRIVE DISCHARGE DAMPER OPEN.
- 4) IF THE ROOM TEMPERATURE IS BELOW 80 F, THE FAN SHALL REMAIN OFF, EP-1 WILL VENT POSITION, AND DISCHARGE DAMPER SHALL CLOSE.
- 5) IF LOSS OF POWER, UNITS SHALL RESTART WHEN POWER IS RESTORED ON A SCHEDULED STARTUP PROGRAM.
- 6) SMOKE DETECTOR ON SUCTION SIDE SHALL SHUT DOWN EXHAUST FAN AND ALARM FIRE COMMAND STATION.

C. UNIT HEATERS



- 1) UN-1 THROUGH UN-12 SEQUENCE OF OPERATION.
- 2) UNIT HEATERS MAY BE STARTED AND STOPPED LOCALLY AT THE UNIT THROUGH A FUSED DISCONNECT SWITCH.
- 3) WHEN THE UNIT HEATER IS ENERGIZED AND THE ZONE THERMOSTAT SHALL MAINTAIN THE ROOM TEMPERATURE AT 65 F, FAN SHALL CYCLE TO MAINTAIN THE TEMPERATURE.
- 4) IN WINTER, IF THE GENERATORS SHOULD OPERATE, THE UNIT HEATERS WILL BE ON CONSTANTLY.

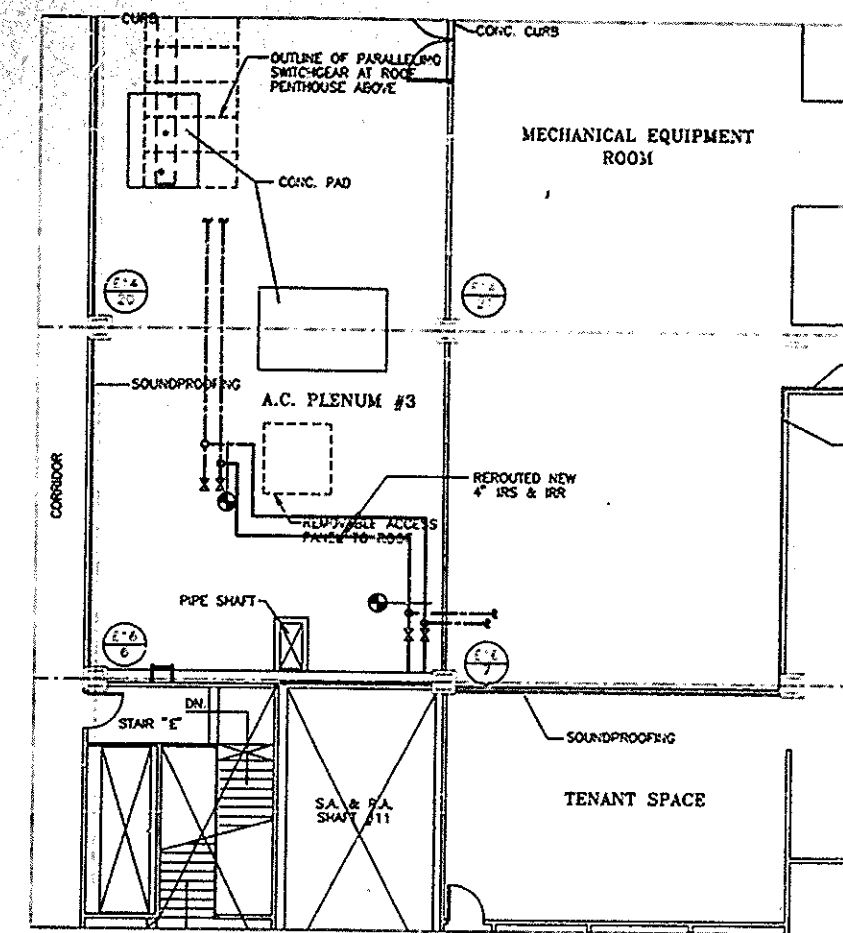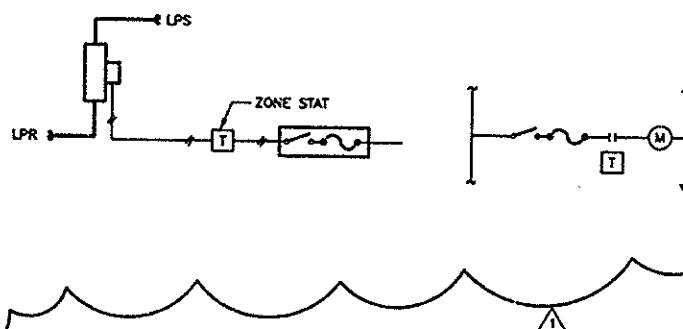

9TH FLOOR PART PLAN

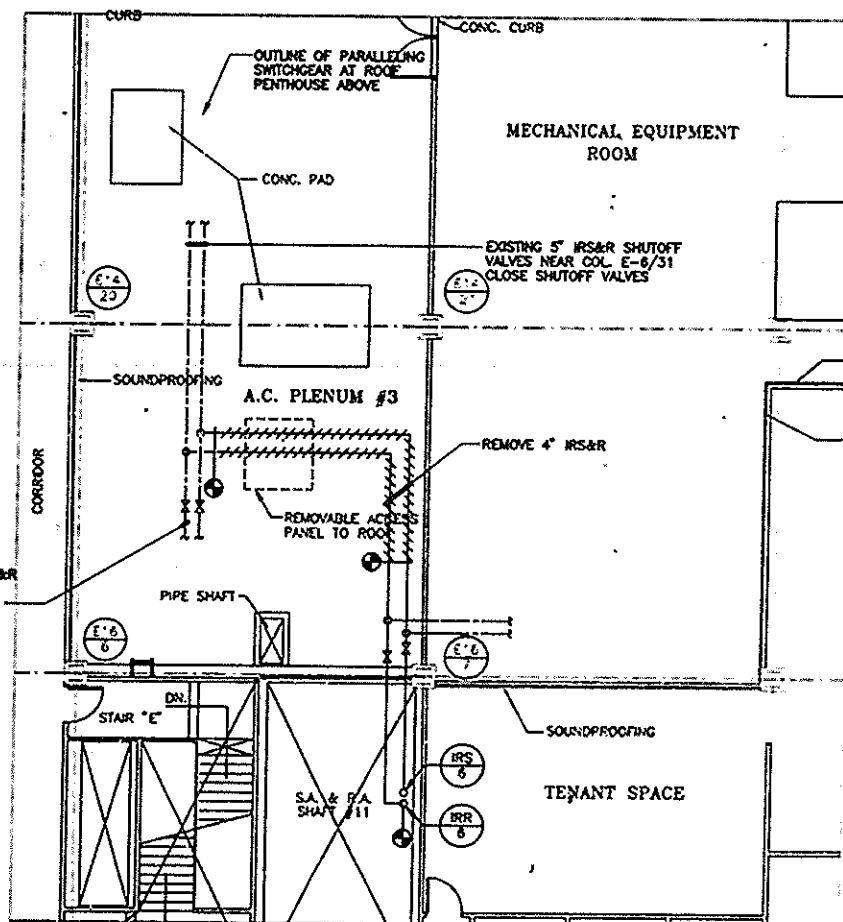

REMOVAL PART PLAN



THE PORT AUTHORITY OF NY & NJ



ORIGINAL SIGNED & SEALED BY N.Y. P.E. (OR R.A.)

Joseph R. Loring & Associates, Inc. consulting engineers

One Pennsylvania Plaza New York, New York 10020-0045 Tel: (212) 512-7400, Fax: (212) 512-7382

THE OFFICE OF DAVID E. LORING, P.E. CONSULTING ENGINEERS

LESLIE E. ROBERTSON ASSOCIATES, P.L.L.C. CONSULTING ENGINEERS

CERTIFY THAT THIS IS A TRUE AND CORRECT COPY OF ONE OF THE CONTRACT DOCUMENTS. THE DATE IN WHICH SAID DOCUMENTS EXISTED AT THE TIME THE SAID CONTRACT WAS EXECUTED BY THE PARTIES.

DATE 11/16/98 BY: [Signature] ENGINEER OF RECORD

DATE 11/17/98 BY: [Signature] CHIEF OF DESIGN

DATE 12/12/97 BY: [Signature] ASST. CHIEF OF DESIGN

DATE 11/17/97 BY: [Signature] ISSUED FOR BID

No. Date Revision Approved

Engineering Department Design Divisions

The World Trade Center

MECHANICAL

PART PLANS AND GENERAL NOTES

STANDBY POWER 5 WORLD TRADE CENTER

MECHANICAL

PART PLANS AND GENERAL NOTES

MECHANICAL

PART PLANS AND GENERAL NOTES

MECHANICAL

PART PLANS AND GENERAL NOTES

MECHANICAL

PART PLANS AND GENERAL NOTES

MECHANICAL

PART PLANS AND GENERAL NOTES

MECHANICAL

PART PLANS AND GENERAL NOTES

MECHANICAL